


ENERGIZER 364/363

SILVER OXIDE



Industry Standard Dimensions

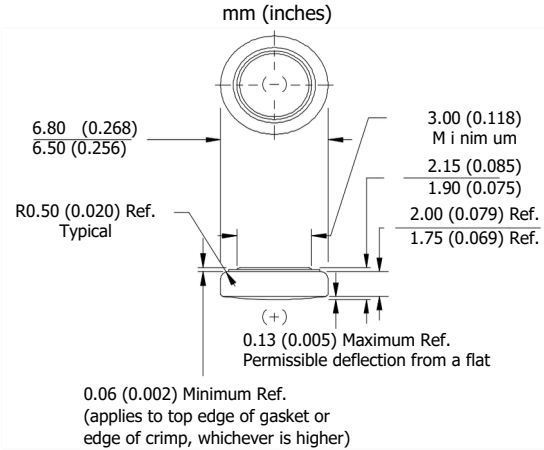


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN
 HIGH PULSE ON DEMAND

Specifications

Chemical System:	Silver Oxide (Zn/Ag ₂ O)
Designation:	IEC-SR60
Nominal Voltage:	1.55 Volts
Typical Capacity:	23 mAh* (to 1.2 volts)
Capacity Test:	68K ohm continuous drain at 21°C
Typical Weight:	0.37 grams
Typical Volume:	0.08 cubic centimeters
Impedance (40 Hz):	5 to 15 ohms


* Varies according to the applied load, temperature, and cutoff voltage.

Cross Section

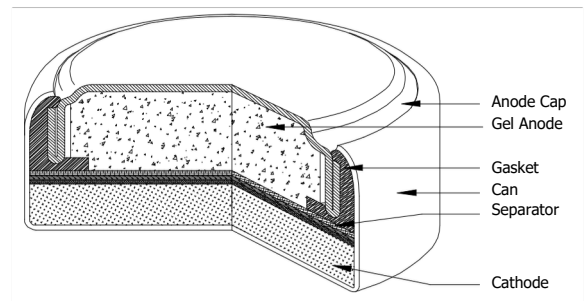


Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

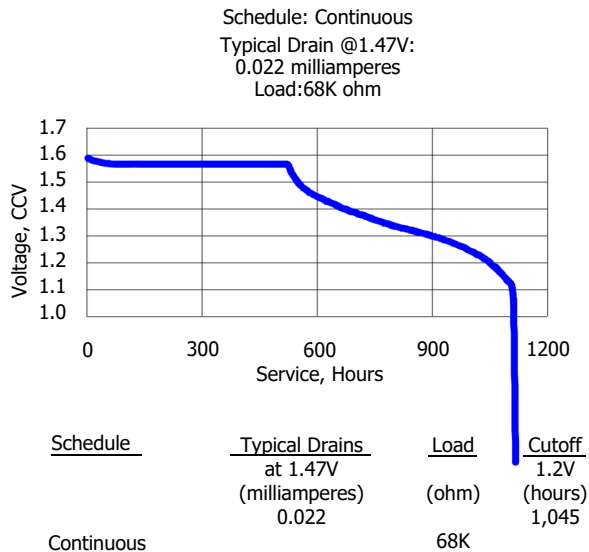

Temperature Characteristics

Typical Performance at Low Discharge Rates

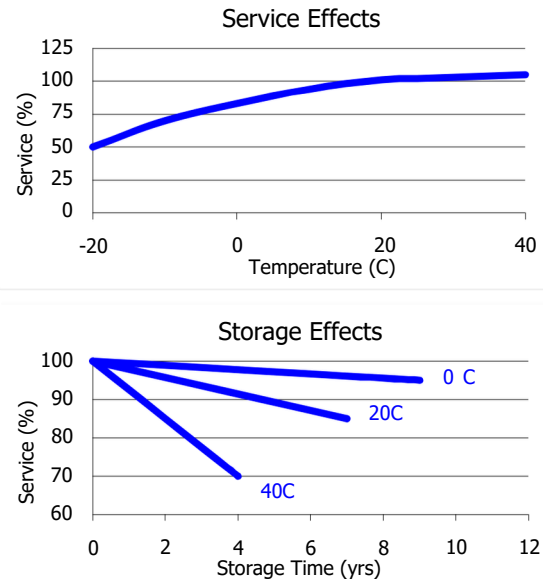

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.