


## ENERGIZER 373

SILVER OXIDE



### Industry Standard Dimensions

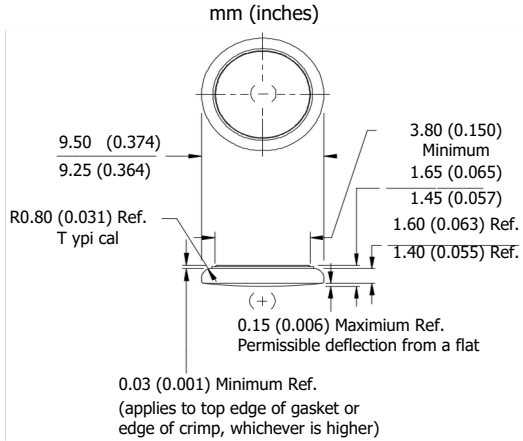


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN

### Specifications

|                    |                                     |
|--------------------|-------------------------------------|
| Chemical System:   | Silver Oxide (Zn/Ag <sub>2</sub> O) |
| Designation:       | IEC-SR68                            |
| Nominal Voltage:   | 1.55 Volts                          |
| Typical Capacity:  | 30 mAh* (to 1.2 volts)              |
| Capacity Test:     | 30K ohm continuous drain at 21°C    |
| Typical Weight:    | 0.50 grams                          |
| Typical Volume:    | 0.12 cubic centimeters              |
| Impedance (40 Hz): | 40 to 50 ohms                       |

\* Varies according to the applied load, temperature, and cutoff voltage.


### Cross Section

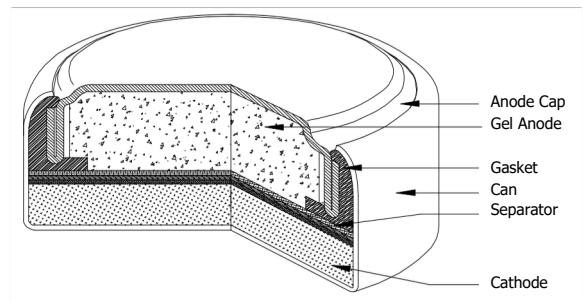

### Typical Discharge Characteristics

Typical Performance at 21°C (70°F)



Schedule: Continuous  
 Typical Drain @1.55V:  
 0.052 milliamperes  
 Load:30K ohm

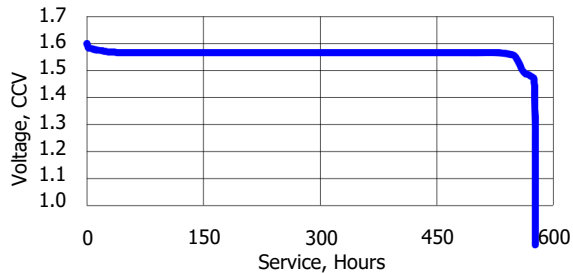

| Schedule   | Typical Drains at 1.55V (milliamperes) | Load (ohm) | Cutoff 1.2V (hours) |
|------------|--|------------|---------------------|
| Continuous | 0.052                                  | 30K        | 577                 |

### Temperature Characteristics

Typical Performance at Low Discharge Rates

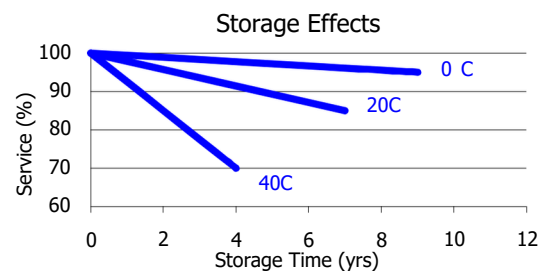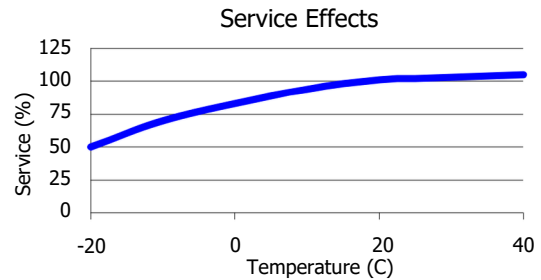

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.