


ENERGIZER 394/380

SILVER OXIDE



Industry Standard Dimensions
 mm (inches)

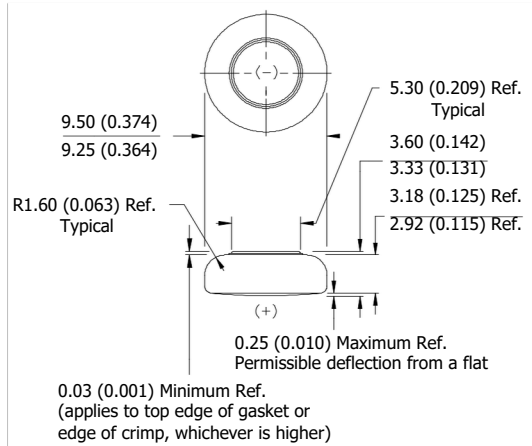


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN
 HIGH PULSE ON DEMAND

Specifications


Chemical System: Silver Oxide (Zn/Ag₂O)
 Nominal Voltage: 1.55 Volts
 Typical Capacity: 63 mAh* (to 1.2 volts)
 Capacity Test: 15K ohm continuous drain at 21°C
 Typical Weight: 1.1 grams (0.039 oz.)
 Typical Volume: 0.25 cubic centimeters (0.015 cubic inch)
 Impedance (40 Hz): 5 to 15 ohms

* Varies according to the applied load, temperature, and cutoff voltage.


Cross Section

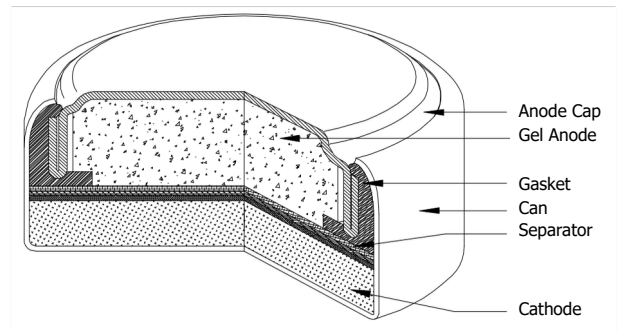

Typical Discharge Characteristics
 Typical Performance at 21°C (70°F)

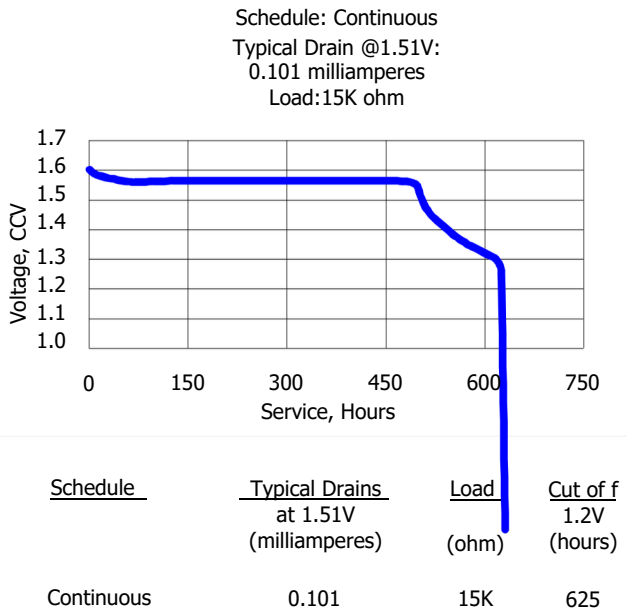

Temperature Characteristics
 Typical Performance at Low Discharge Rates

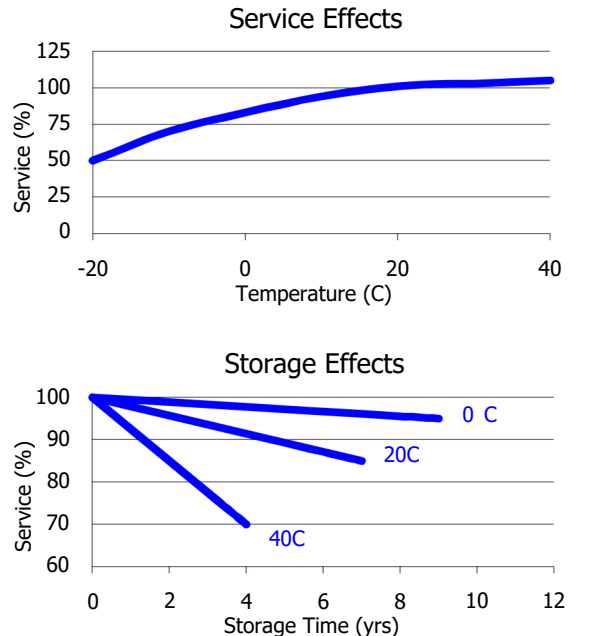

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.